

Quiz 1 *Fun Size*

Date: February 23, 2012

UT EID: _____

Printed Name: _____
Last, First

Your signature is your promise that you have not cheated and will not cheat on this exam, nor will you help others to cheat on this exam:

Signature: _____

Instructions:

- Closed book and closed notes.
- No calculators or any electronic devices (turn cell phones off).
- You must put your answers on pages 2-6 only.
- You have 75 minutes, so allocate your time accordingly.
- Show your work, and put your answers in the boxes.
- *Please read the entire quiz before starting.*

(5) **Question 1.** What is the value of the unsigned four-digit hexadecimal number 0x1210? Give your answer as a decimal number. -----

(6) **Question 2.** For each of the following statements fill in the word or phase that matches best

Part a) A drawing with circles (programs) and rectangles (hardware) where the arrows illustrate the type, direction and amount of data being transferred. -----

Part b) The subset of elements from which the entire set can be created.-----

Part c) A computer system where the I/O devices are accessed in a similar way as memory is accessed (i.e., using the same instructions). -----

(6) **Question 3.** Consider the following instruction


```
ADDS R0,R1,R2
```

What does it mean if the overflow (V) bit is set?


What does it mean if the carry (C) bit is set?

(5) **Question 4.** A 30-bit number is approximately what value in decimal?

(10) Question 5. Interface the switch to PA0 using positive logic (pressed is high, not pressed is low). No software is required in this question, and you may assume PA0 is an input. Your bag of parts includes the switch, the 7406, and one resistor each of the values {1Ω, 10Ω, 100Ω, 1kΩ, 10kΩ, 100kΩ and 1MΩ}. Pick the best resistors to use (you will not need them all.) Use the 7406 only if it is absolutely needed. Assume V_{OL} of the 7406 is 0.5 V.

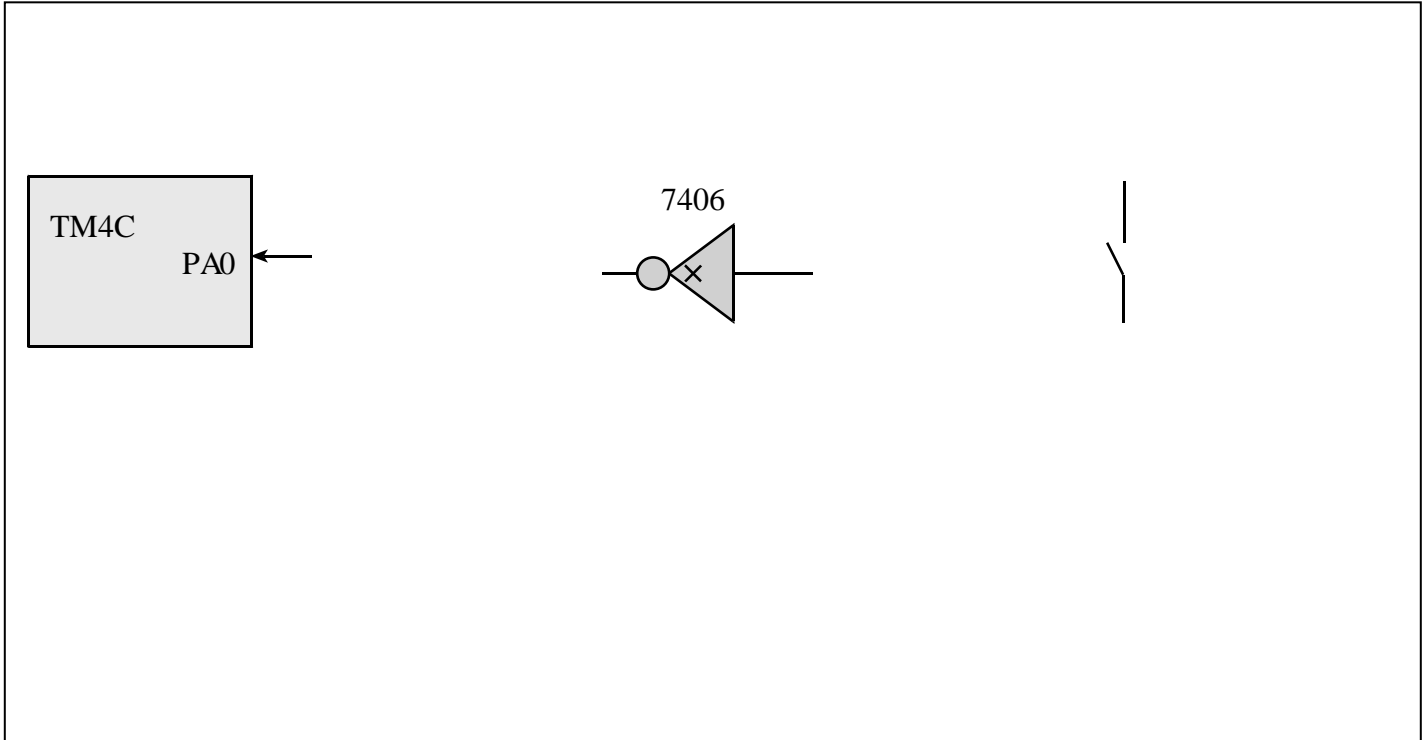

(5) Question 6. You are given an LED with a desired operating point of 2.5V at 10 mA. Sketch the approximate voltage versus current relationship for this diode.

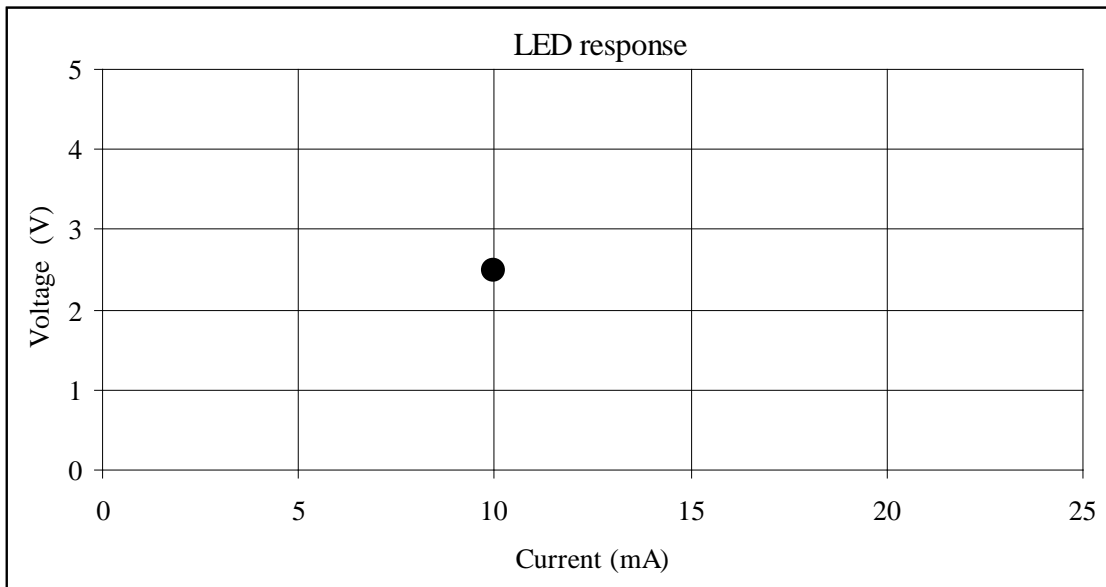

(4) **Question 7.** Consider the following piece of code. Assume the PC is initially 0x00000134, and the stack pointer is initially 0x20000408.

```
0x00000134 F04F0001 Start MOV r0,#0x01
0x00000138 F000F807          BL Test      ;0x0000014A
0x0000013C          ;next instructions
```

```
0x0000014A B500          Test PUSH {lr}
0x0000014C 4400          ADD r0,r0,r0
0x0000014E BD00          POP {pc}
```

Think about how this program executes up to and including the execution of **ADD**

Fill in specific hexadecimal bytes that are pushed on the stack.

Using an arrow, label to which box the SP points.

What is the value of PC, LR, R0, and SP after the ADD instruction is executed.

(4) **Question 8.** Show the C code to create a variable named **Position** with range -128 to +127?

(4) **Question 9.** Show the assembly code to create a variable named **Position** with range -128 to +127?

(10) **Question 10.** Write assembly code to swap R0, R1, and R2 (R0 goes to R1, R1 goes to R2, and R2 goes to R0). You must use the stack and cannot use any global variables or other registers. You do not need to set the reset vector or initialize the stack in this question.

(20) **Question 11.** Assume two positive logic switches are connected to PA2 and PA0, and one positive logic LED is connected to PA5. Write an assembly language program (start, initialization, loop) that turns on the LED if exactly one of the two switches is on. Turn off the LED if neither or both switches are pressed. After initializing the port, the input from switches and output to LED will be performed over and over continuously. Your code must have comments and be written in a **friendly** manner. You may use the following definitions

```
GPIO_PORTA_DATA_R EQU 0x40004080
GPIO_PORTA_DIR_R  EQU 0x40004400
GPIO_PORTA_AFSEL_R EQU 0x40004420
GPIO_PORTA_DEN_R  EQU 0x4000451C
SYSCTL_RCGCGPIO_R EQU 0x400FE608
SYSCTL_RCGCGPIO_GPIOA EQU 0x00000001 ; port A Clock Gating Control
```

(20) Question 12. Write a C program that controls a kidney dialysis pump. Port B is an 8-bit output that adjusts power to the pump. The range is 0 (no power) to 255 (full power). Port D is an 8-bit input that contains the measured blood flow in ml/min. The range is 0 (no flow) to 255 ml/min. The goal is to pump blood at 150 ml/min. If the measured flow is less than 150 ml/min, increase the power by 1 unit. If the measured flow is more than 150 ml/min, decrease the power by 1. Implement ceiling and floor (do not let the power go above 255 or below 0). First initialize Port B and Port D, then run the pump controller over and over continuously. Initially, power out should be 0. You may use the symbols

GPIO_PORTB_DATA_R, GPIO_PORTB_DIR_R, GPIO_PORTB_AFSEL_R,
GPIO_PORTB_DEN_R, GPIO_PORTD_DATA_R, GPIO_PORTD_DIR_R,
GPIO_PORTD_AFSEL_R, GPIO_PORTD_DEN_R, SYSCTL_RCGCGPIO_R (set bits 1 and 3).
To adjust power to the pump, write 8 bits to Port B. To measure the flow, read 8 bits from Port D.



Same appendix as HW4