

Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

EM-99 (OMMI DIRECTIONAL E. C. M)






E	✓	$-64 \pm 2\text{dB}$	J	$-54 \pm 2\text{dB}$
F		$-62 \pm 2\text{dB}$	K	$-52 \pm 2\text{dB}$
G		$-60 \pm 2\text{dB}$	(0dB=1V/ μ bar. 1KHz) (4.5VOLT 2.2K Ω)	
H		$-58 \pm 2\text{dB}$		
I		$-56 \pm 2\text{dB}$		

SPECIFICATIONS

- SENSITIVITY : AS ABOVE
- IMPADANCE : LOW IMPADANCE
- FREQUENCY : 20~12000HZ
- OPERATION VOLTAGE : 1.5~12V
- STANDARD OPERATION VOLTAGE : 4.5V
- CURRENT CONSUMPTION : MAX 0.5mA (AT 6V)
- SENSITIVITY REDUCTION : WITHIN-3dB AT 3V
- S/N RATION : MORE THAN 40dB

FREQUENCY RESPONSE

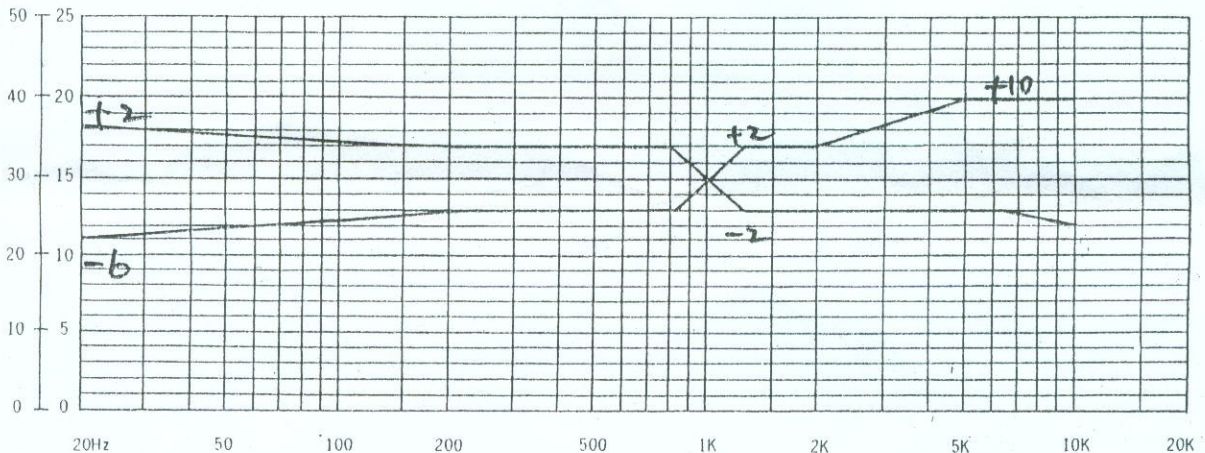

Schematic Diagram

