# Effect of market changes on the required amounts of frequency regulation ancillary services in ERCOT

Juan Andrade, Yingzhang Dong, and Ross Baldick
October 26, 2018

#### Abstract


- In restructured electricity markets in the US, there are multiple ancillary services, including frequency regulation and two or more types of contingency reserve.
- Frequency regulation is used to maintain supply-demand balance within each real-time market dispatch interval, which is either 15 or 5 minutes in duration, depending on region.
- As short-term load variability increases, greater quantities of frequency regulation are required to maintain electrical frequency within limits, ceteris paribus.
- With additional renewable resources such as wind, the corresponding net load variation increases.
- As wind capacity increases, we would also expect that more frequency regulation would be procured.
- The Electric Reliability Council of Texas (ERCOT) has experienced huge growth in wind over the last 20 years.
- However, the amount of frequency regulation ancillary service procured has typically decreased over time.
- We investigate why this has occurred, identifying a number of changes in the market design.
- The work highlights that market designs evolve to make better use of resources.

#### Outline

- Background: regulating reserves and frequency control,
- Description of analysis,
- Analysis limitations,
- Qualitative observations,
- Conclusion.

- Significant development of utility-scale renewable generation in U.S. in the last two decades.
- Majority of these renewables are wind, but with solar now also growing rapidly.
- Texas has the largest amount of wind of any U.S. state:
  - The Electric Reliability Council of Texas (ERCOT) region has the largest penetration of wind among North American Interconnections,
  - Around 21 GW of wind power in ERCOT (about 22% of total installed capacity)(\*).
  - Wind provided 17% of electrical energy in ERCOT in 2017 (\*).
  - Most wind capacity installed in the last ten years.



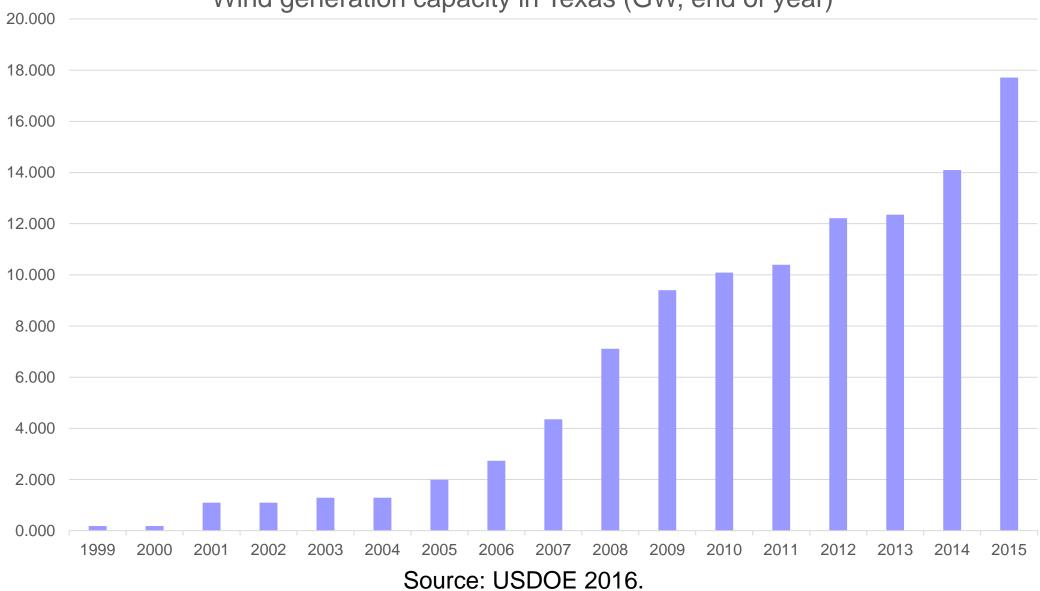

- Current and future environmental policies and decreasing capital costs will likely result in further growth of renewable capacity.
- Given the intermittent/variable production of renewable generation, concerns about system reliability have arisen.
- Maintaining historical levels of reliability in the face of increasing intermittent renewables might increase costs:
  - For example, requirements for procured Ancillary Services might increase significantly.
- First discuss reliability and implications for required procured capacity of Ancillary Services.
- Then explore historical data for wind in ERCOT.

• The concept of system reliability can be seen from two different time horizons (\*):

System reliability


System security System adequacy Will there be enough capacity to How to mitigate generation-demand imbalances at any time with the reliably satisfy the demand? given facilities? Generation reserve **Ancillary Services** margin targets Short term (Minutes-Months) Long term (Months- Years)

#### Focus of analysis in this presentation


- What are Ancillary Services (AS)?
  - Facilitate reliable delivery of energy from generation to load.
  - Examples:
    - Regulating reserve: essentially continuously control of generation (or possibly load and storage) to restore frequency towards nominal in short-term (seconds to minutes):
      - frequency deviation is due to perturbed supply-demand balance and load forecast errors,
    - Spinning or Responsive reserve: respond to sudden supply-demand imbalances typically due to outage of a generator (seconds to tens of minutes),
    - Non-spinning reserve: restore availability of other reserves if depleted by previous actions,
    - Voltage control: reactive power supply.
  - ERCOT currently recognizes 3 main types of reserves as commercial products:
    - Regulating Reserve, divided into:
      - Regulation-Up and Regulation-Down (signals to generation on typically 4 by 4 second basis, collectively "regulation AS"),
    - Responsive Reserve (full deployment within 10 minutes; known as "spinning reserves" in other US markets; up to 50% of requirements provided by interruptible loads),
    - Non-spinning reserve (committed and deployable within 30 minutes).
  - We will refer to these three types of ERCOT AS as "operational reserves."


#### • Time frame:

- Operational reserves cover from seconds up through the length of the real-time economic dispatch cycle (5 minutes currently in ERCOT) and longer for full deployment of responsive reserves and for nonspinning reserve deployment.
- (In the 5 minute and longer time domains, generation economic dispatch also helps to follow net load variation, and generation unit-commitment follows daily load periodicity.)

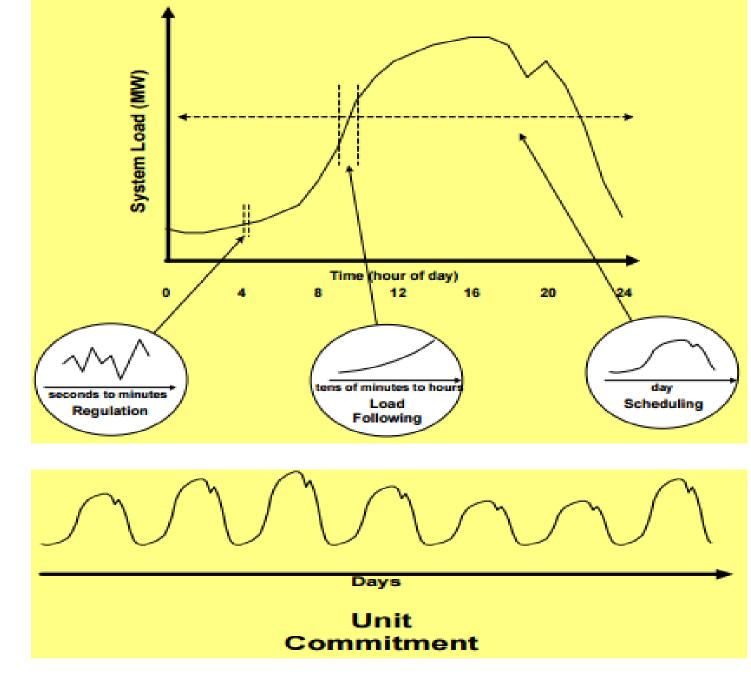


- Putting aside (the typically small) variability of dispatchable generation:
  - Regulating reserves primarily compensate for short-term variability of net load (load minus renewables) occurring between economic dispatch updates.
- Regulating reserve capacity requirements in ERCOT are specified for each of six blocks of four hours over the day and updated monthly based on:
  - Historical use ("deployment") of those reserves,
  - Anticipated changes in regulation AS needs due to changes in renewable capacity, using results of 2008 "GE study."
- All else equal, increasing wind capacity can be expected to increase needed regulating reserve capacity:
  - Results of GE study generally qualitatively consistent with this observation,
  - Increased procurement of AS would increase total costs.
- ERCOT procures AS in day-ahead market based on AS requirements.
- How does the historical record compare with this expectation?

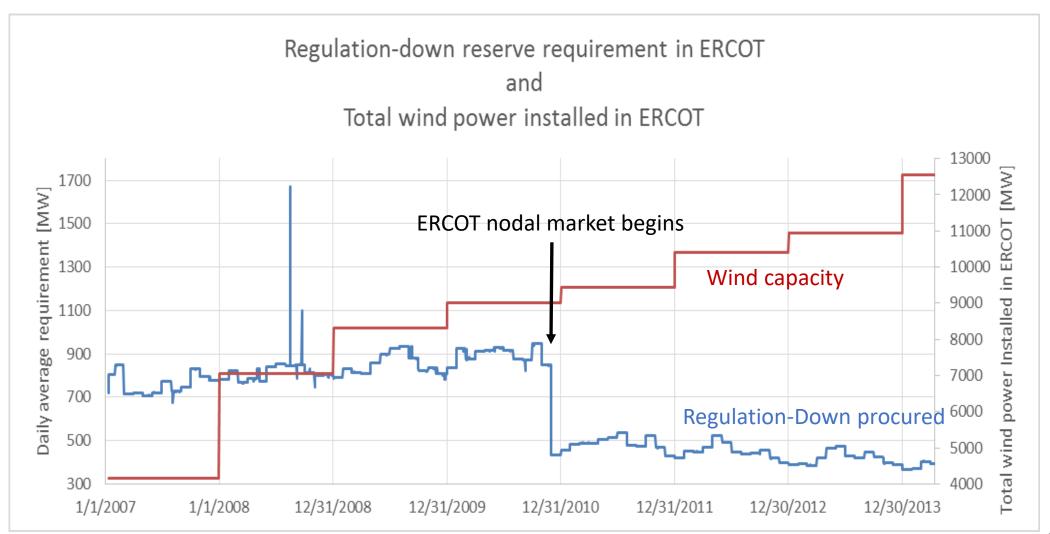

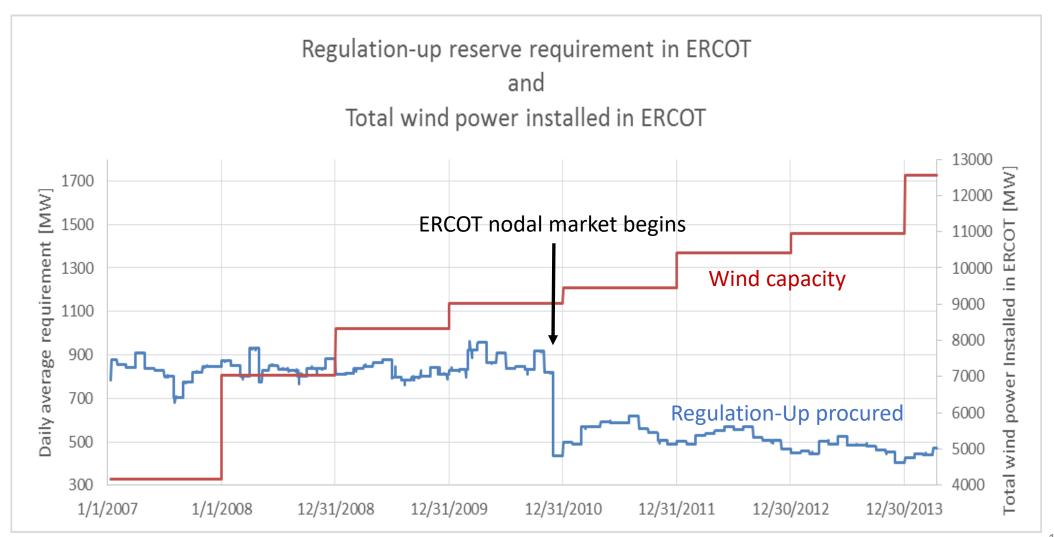

- Regulation-up and regulation-down reserve requirements have decreased over time despite huge increase in renewables!
- Qualitatively and quantitatively inconsistent with predictions of GE study!
- Adjustment down over time reflects the monthly updates of requirements based on historical use of the regulation resources.
- Key question is: why have requirements decreased over time despite increases in wind capacity?
- Clue: Major decrease in requirements in 2010 when market design was significantly changed:
  - Zonal representation of transmission replaced by nodal,
  - Portfolio based dispatch replaced by unit specific dispatch,
  - Day-ahead centralized unit commitment added to real-time market, and
  - Likely most significantly, dispatch interval shortened from 15 minutes to 5.

- Potential confounding issue: Have there been changes over time in the performance of ERCOT in compensating for short-term variations of supplydemand balance?
  - Perhaps the decreasing regulating reserve requirements over time corresponds to worse frequency control performance.
- Frequency control performance is assessed by the North American Electric Reliability Corporation (NERC) in terms of three standards:
  - Control Performance Standard 1 (CPS1, used for assessing control of frequency, reflecting performance of regulation AS in compensating for supply-demand balance variations),
  - Control Performance Standard 2 (CPS2, used for assessing performance of multiple balancing areas in an interconnection; not relevant to ERCOT single balancing area in ERCOT interconnection),
  - Disturbance Control Standard (DCS, used for assessing response to contingencies; not relevant for regulation AS).
- CPS1 metric assesses ability to compensate for short-term variations of supply-demand balance, and ranges up to 200%, with higher scores being better:
  - Relevant for assessing frequency control performance provided by regulation AS.

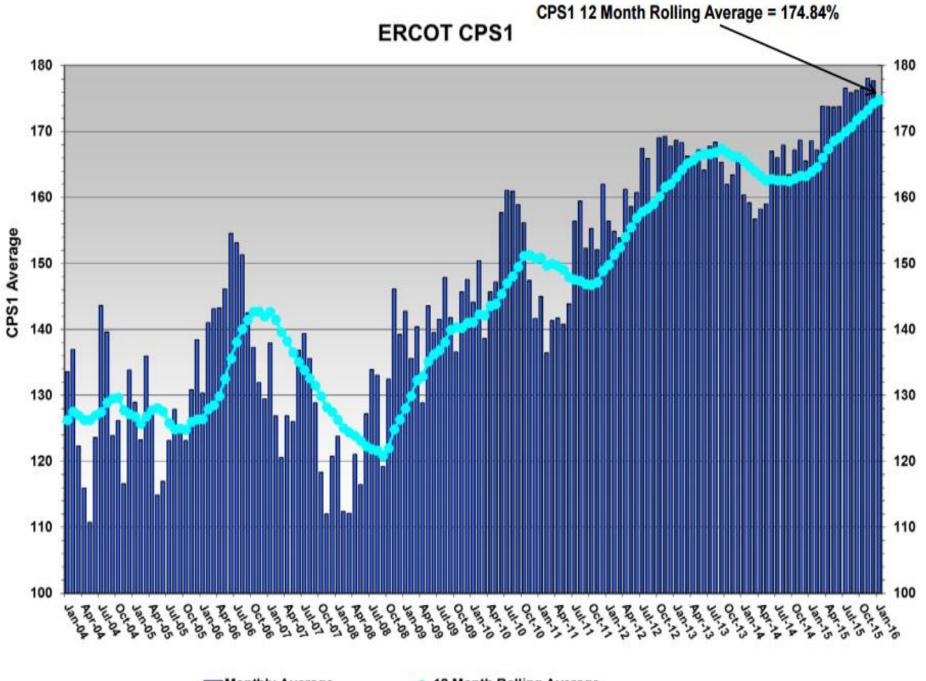

- The requirements for regulation AS have *reduced* over time:
  - *despite* increases in installed wind power capacity over time, and hence despite increases in the short-term variability of the supply-demand balance!
  - despite CPS1 performance improving over time!
- What explains the decrease in regulation AS requirements despite increased wind and improved CPS1 performance?
- "Big bang" change in 2010 provides clue that changes in market operations and rules have changed needs for regulating reserve capacity:
  - Also many other relatively smaller changes to market rules, "Nodal Protocol Revision Requests" (NPRRs).
  - Use statistical analysis to quantify effects of these changes.


## Description of analysis

- Use historical record of procured regulating reserves and other data:
  - Identify the NPRRs that were statistically significant for the sudden changes in reserves requirements.
  - Identify other significant variables (e.g. installed wind power, demand)
- What data did we use?
  - Historical procured daily average Regulation-Up and Regulation-Down reserves requirements in ERCOT.
  - Daily maximum and minimum demands in ERCOT.
  - Installed generation by type (Coastal wind, non-coastal wind, thermal generation)
- An initial list of NPRRs related to wind was provided by Walter Reid (Wind Coalition), Shams Siddiqi (Crescent Power), and Dan Jones (formerly ERCOT Independent Market Monitor, now Crescent Power).
  - This list was trimmed to 23 NPRRs before applying detailed statistical analysis,
  - Some of these NPRRs were coincident with zonal to nodal change,
  - Several groups of changes were implemented within a single month and also grouped together.

# Description of analysis

#### Methodology:

 We split the whole study-period into sub-periods delimited by the implementation months of the groups of NPRRs considered.



- The transition from Zonal to Nodal market was also considered in the subperiod definition.
- For each sub-period, a regression analysis was performed.
- The regressors considered were: Installed power of each type, and demand.
- The impact of the introduction of a new NPRR at the beginning of each subperiod was assessed using Regression Discontinuity Design (RDD):
  - Regressors include a dummy variable indicating pre-versus post-introduction of NPRR. 18

## Analysis limitations

- The analysis uses data from ERCOT between 01/01/2007 to 04/13/2014:
  - Limited ability to predict outside this time-frame,
  - Requirements for regulation AS have continued to decrease subsequently, but with smaller rate of decrease, and recent evidence of increasing requirements.
- Cannot make strong statements about counter-factual scenarios such as:
  - What would be the impact if the "Competitive Renewable Energy Zone" (CREZ) transmission in West Texas had not been developed?
  - What would be the impact of a massive solar development in Far West Texas?
- Main focus is on regulation AS:
  - Related future work includes analysis of responsive and non-spinning AS.

- There are significant correlations between requirements for Regulation-Up and Regulation-Down reserves and:
  - Daily minimum demand.
  - Daily maximum demand.
  - Installed wind power.
- There are significant correlations with past reserves requirements:
  - ERCOT uses the previous 30 days deployed reserves, in part, to determine the required reserves for the next month.
  - For "big bang" transition, past deployments before December 2010 were divided by two to use in determination of December 2010 and later regulation requirements.
  - Required and deployed reserves are strongly correlated.
- Complicates the analysis of the statistics.

- RDD indicates that the following NPRRs had a significant effect on the required amounts of regulating reserves:
  - NPRR 352:

Improvements in prediction of the maximum sustained energy production of a wind resource after a period of curtailment of the wind resource.

• NPRR 361:

Requires submission of 5 minute resolution wind data for real-time purposes.

• NPRR 460:

Relaxes the wind generation resource ramp rate limitation from 10% per minute of nameplate rating to five minute average of 20% per minute of nameplate rating and with no individual minute exceeding 25%.

 Note that there have been literally hundreds of proposed and implemented changes to the details of the market design!

- Most significant change for regulation AS requirements associated with move from zonal to nodal market:
  - in zonal market the real-time dispatches were every 15 minutes to portfolios, and in nodal market are every 5 minutes or more often to individual generation units;
  - unit specific dispatch in nodal allows for more precise control of generation;
  - co-optimization of energy and ancillary services in day-ahead market has likely improved ability to utilize flexibility of generation.
- Decreasing the dispatch interval from 15 to 5 minutes:
  - amount of procured regulation AS only needs to compensate for supply-demand variation and forecast error in a 5 minute time frame instead of a 15 minute time,
  - less operating reserves, specifically less regulation AS, is needed to cope with the smaller uncertainties between each dispatch update.
- "Big bang" in 2010 and NPRRs more than compensated for effect on regulation AS of increased net load uncertainty due to increased wind:
  - (Increase in 2012 by 500MW in responsive requirements & decrease by 500MW in non-spinning apparently associated with resource adequacy concerns and not directly associated with wind, but may be indirectly attributable to effect of wind.)
  - Further investigation necessary for responsive and non-spinning reserves.

- Various changes in ERCOT market design have reduced need for procured Regulation-Up and Regulation-Down despite increases in wind.
- Effect of changes in rules on requirements for regulation AS is apparently as large as a change of tens of GW of wind generation!
- How much more wind can be integrated without needing, for example, large-scale storage?
  - Depends on interplay of ingenuity of market participants and fundamental physical requirements to match supply-demand balance with the decreasing inertia contributed by thermal generation,
  - "It's hard to make predictions, particularly about the future."

#### Conclusion

- Requirements for regulating reserves have tended to decrease over time in ERCOT despite increasing amounts of renewables and improved CPS1 scores.
- "Big bang" in 2010 together with several NPRRs have resulted in better utilization of regulation AS capacity:
  - Reducing the total required regulation AS capacity, despite the greatly increasing amount of variable generation in system.
- Future predictions of AS requirements are uncertain:
  - Increased renewables would tend to increase needs, but
  - Changes in rules and operational methods can utilize underlying AS capacity more effectively, and
  - Introduction of battery and other fast responding resources could further change needs for procured capacity.