
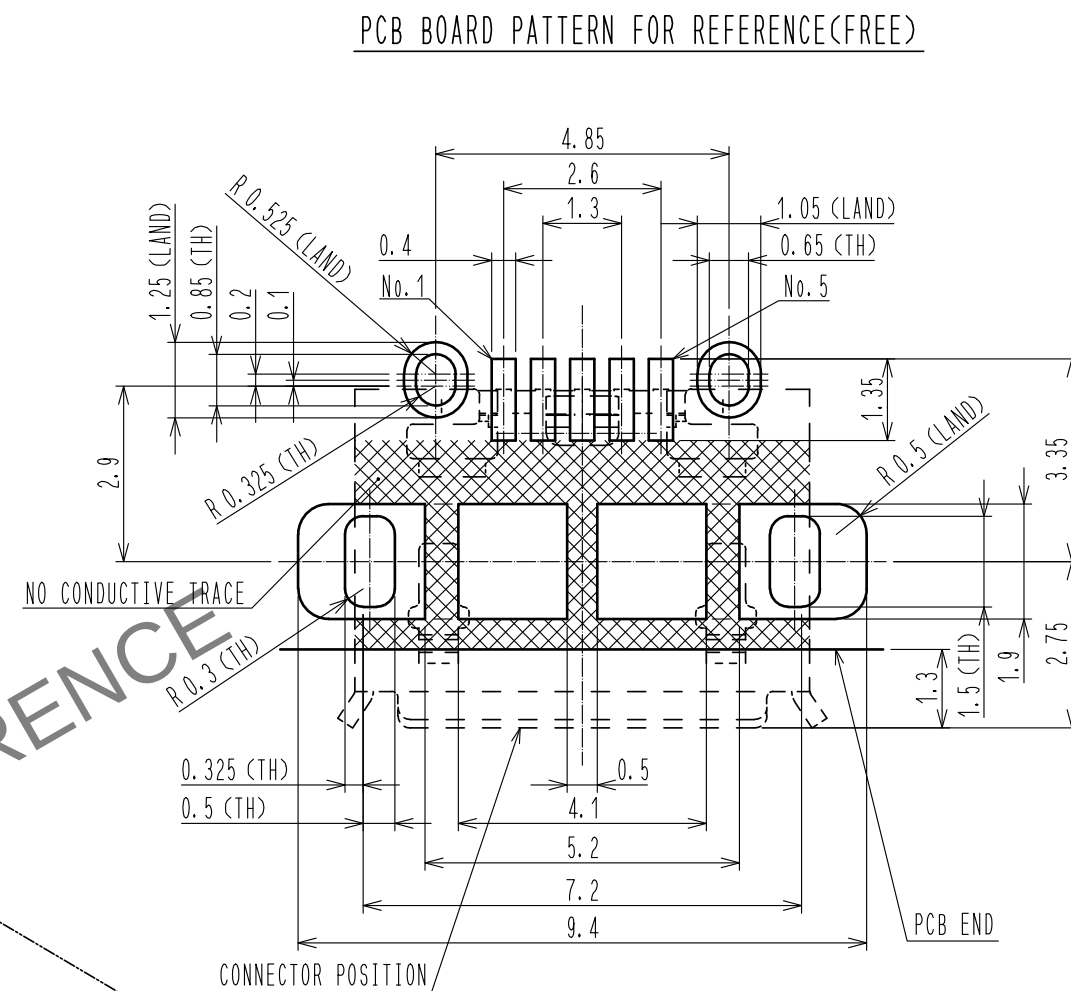
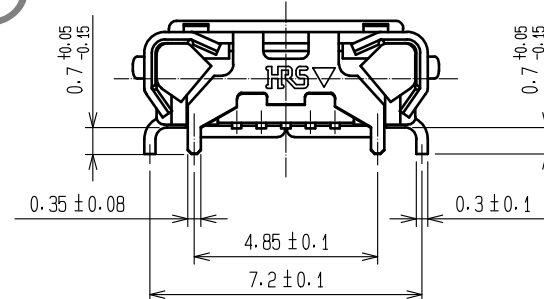
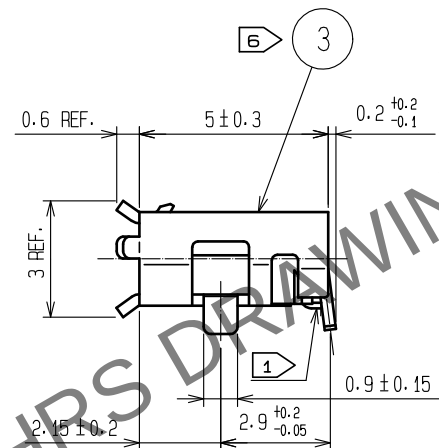
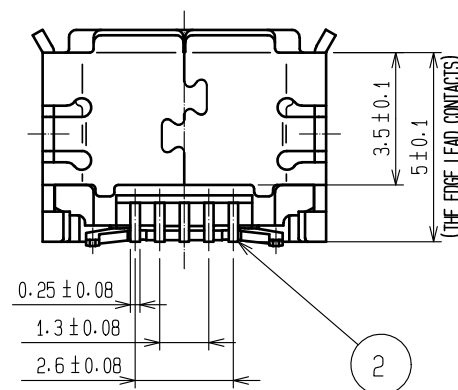
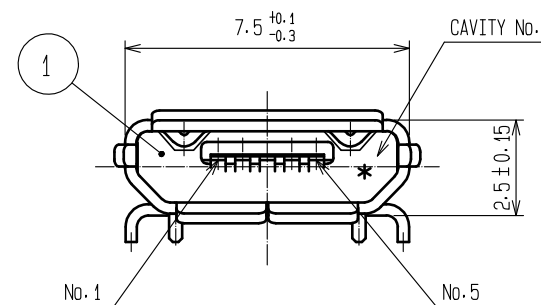


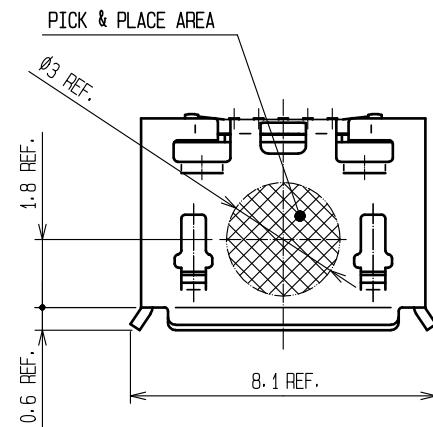


GENERAL TOLERANCE IS $\pm 0.05\text{mm}$


- NOTES.
- 1 CO-PLANARITY IS WITHIN 0.08mm MAX.
 - 2 PLATING
CONTACT AREA :GOLD 0.05 μm MIN OVER PALLADIUM NICKEL 0.75 μm MIN.
LEAD AREA :GOLD 0.05 μm MIN.
UNDER PLATING:NICKEL 2 μm MIN.
 - 3 PER REEL : 2000 pcs.
 4. INTERFACE DIMENSIONS TO USB2.0 SPECIFICATION.
 5. AS FOR PART No.3, THE PERFORMANCE REMAINS GOOD EVEN IF THERE IS A RUBBING WOUND BY THE ASSEMBLY PROCESS.
 - 6 AS FOR PART No.3, THERE IS NO PROBLEM ON THE QUALITY THOUGH THERE MIGHT BE A DIFFERENCE IN THE COLOR DEPENDING ON THE PLATING PROCESSING LOT.

2	COPPER ALLOY	2	5	PE	
1	LCP	BLACK UL94V-0	4	PS	
NO.	MATERIAL	FINISH . REMARKS	3	STAINLESS STEEL	OVER PLATING : TIN 3.8 μm MIN. UNDER PLATING : NICKEL 1.25 μm MIN. LUBRICANT
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
	HIROSE ELECTRIC CO., LTD.	APPROVED : NM. NISHIMATSU	15.10.27	DRAWING NO.	EDC-126863-30-00
		CHECKED : KN. ICHIKAWA	15.10.27	PART NO.	ZX62D-B-5PA8(30)
		DESIGNED : TS. ITO	15.10.27	CODE NO.	CL242-0056-3-30
		DRAWN : AK. AKIYAMA	15.10.27		



PANEL CUTOUT FOR REFERENCE

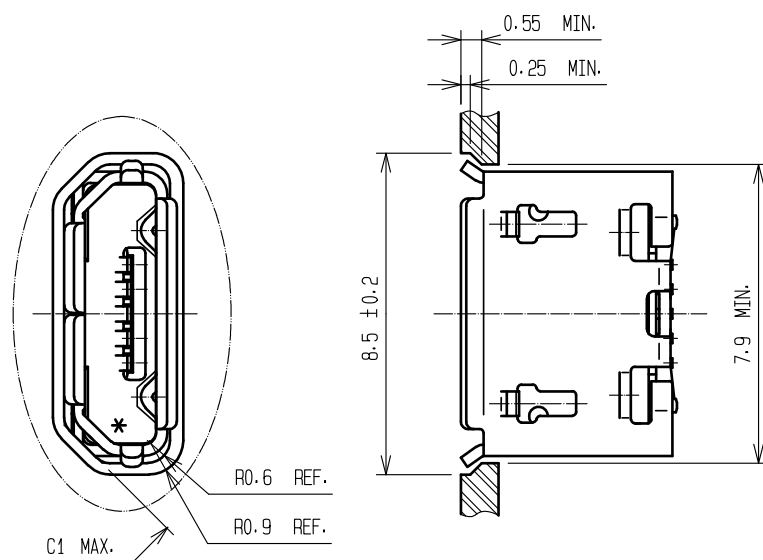

③ DRAWING FOR PACKING(FREE)

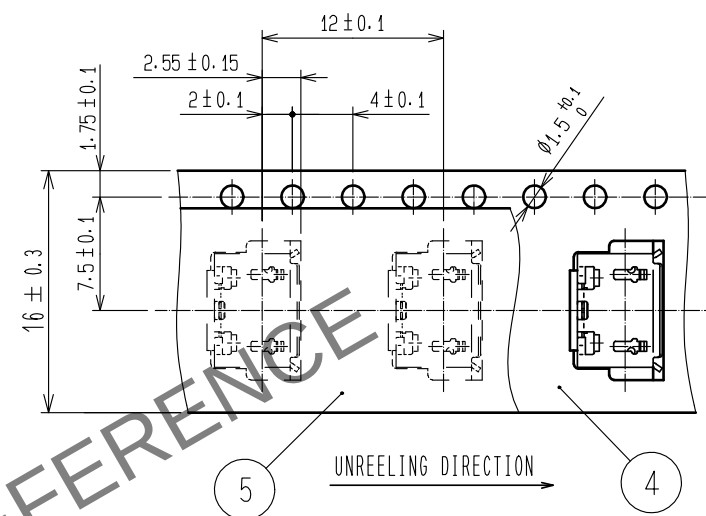

MATED WITH CORRESPONDING PLUG

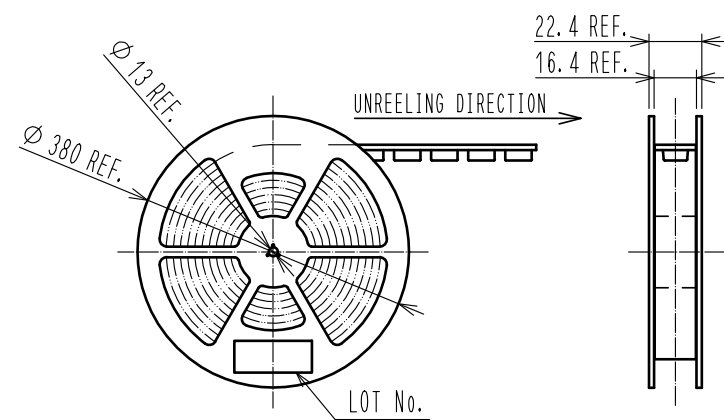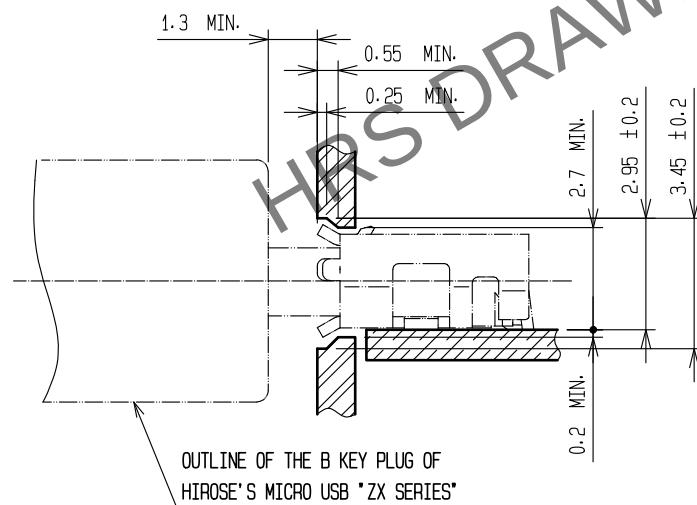

HRS

DRAWING NO.	EDC-126863-30-00
PART NO.	ZX62D-B-5PA8(30)
CODE NO.	CL242-0056-3-30