

Tune-Up Tuesday #1 for August 31, 2021

% You should be able to copy-and-paste this page into Matlab and execute it.

% Please complete each section below.

% Please include your Matlab code as well as any answers to the questions as

% MATLAB comments in the full answer that you submit on Canvas.

% (a) Copy, paste and run the Matlab code from slide 1-16 to generate a cosine signal

% at frequency 440 Hz to play it as an audio signal at a sampling rate of 8000 Hz:

```
f0 = 440;           % 440 Hz (A in 4th octave, or A4)
fs = 8000;         % sampling rate in Hz (a.k.a. samples/s)
Ts = 1/fs;        % sampling time in s
t = 0 : Ts : 3;   % sample times from 0s to 3s
x = cos(2*pi*f0*t);
sound(x, fs);
```

% (b) Modify the code in (a) to change the cosine frequency to 880 Hz and run the code.

% Any difference in what you hear vs. a cosine frequency of 440 Hz?

% *Note: A note in the next higher octave is at twice the frequency. The 'A' note*

% *is 440 Hz in the fourth octave, 880 Hz in the fifth, 1760 Hz in the sixth, etc.*

```
pause(4);          % pause for 3s to prevent sounds from overlapping
f0 = 880;          % change from 440 Hz (A4) to 880 Hz (A5)
fs = 8000;        % sampling rate in samples/s
Ts = 1/fs;        % sampling time in s
t = 0 : Ts : 3;   % 3 seconds in duration
x = cos(2*pi*f0*t);
sound(x, fs);
```

% Changing f0 from 440 Hz to 880 Hz creates a sinusoidal tone
% at 880 Hz that sounds like a higher frequency tone ("pitch")
% than the cosine at 440 Hz. They are both 'A' notes on the Western
% scale, with 440 Hz in the fourth octave and 880 Hz in the fifth.
% The 880 Hz tone sounds louder than the 440 Hz tone.

% (c) Using MATLAB, plot the first 12.5 ms of the signal in the time domain using the

% **plot** command.


% *Note: The reason part (c) had asked to plot the signal over 12.5ms is so you could see the*
% *oscillation. Plotting the signal over 3s would have 24000 points, i.e. 3s x 8000 samples/s,*
% *and plotting 24000 points in a small plot window would blur together into a blue rectangle.*
% *This part could have been done with f0 = 440 Hz or f0 = 880 Hz.*

```
f0 = 440;           % change from 440 Hz (A4) to 880 Hz (A5)
fs = 8000;         % sampling rate in samples/s
Ts = 1/fs;        % sampling time in s
t = 0 : Ts : 12.5*10^(-3);
x = cos(2*pi*f0*t);
plot(t, x);       % see the next page for plots for f0=440 and f0=880
```

% (d) Describe your plot in (c).

% Plot has jagged peaks and troughs. Some peaks don't reach 1, and some
% troughs don't reach -1, because there aren't enough samples. Not periodic.

% part (c) plot with $f_0 = 440$

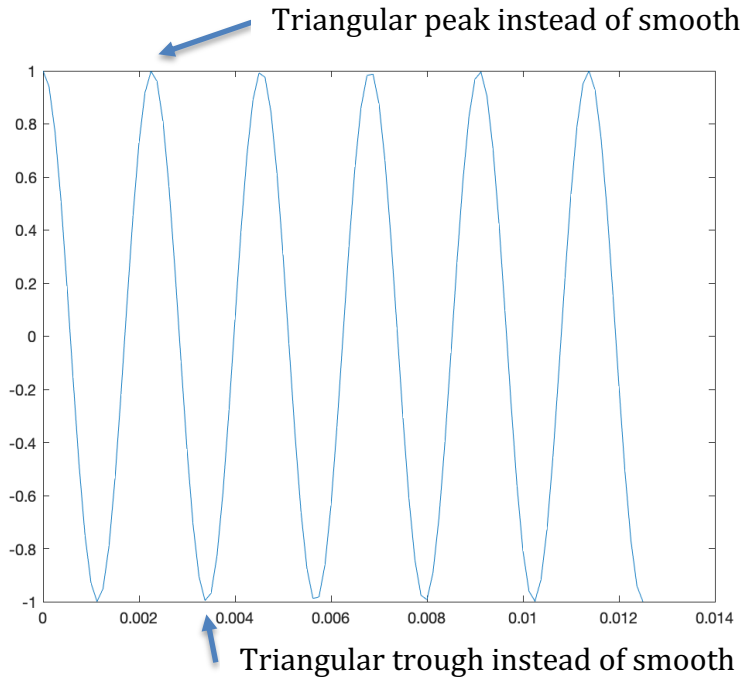

% part (c) plot with $f_0 = 880$ Hz

