Goals of the lecture

Repeated Computation of a Global Function

- Deadlock Detection
- Clock Synchronization
- Distributed Branch and Bound Search
- Distributed Debugging

Desirable Characteristics

- Light Load
  - not more than k messages/time step
- High Concurrency
  - $\log_k N$ time steps
- Symmetry (Equitable Workload)
  - load balancing
  - fairness

Some Possible Approaches

- Centralized



- Ring-based



- Hierarchical



All links are logical connections

Message Flow Table

Static Hierarchy

- Number of nodes (processe) = 7

time step	Messages		
1	$1,3 \rightarrow 2$	$5,7 \rightarrow 6$	
2	$1,3 \rightarrow 2$	$5,7 \rightarrow 6$	$2,6 \rightarrow 4$
3	$1,3 \rightarrow 2$	$5,7 \rightarrow 6$	$2,6 \rightarrow 4$

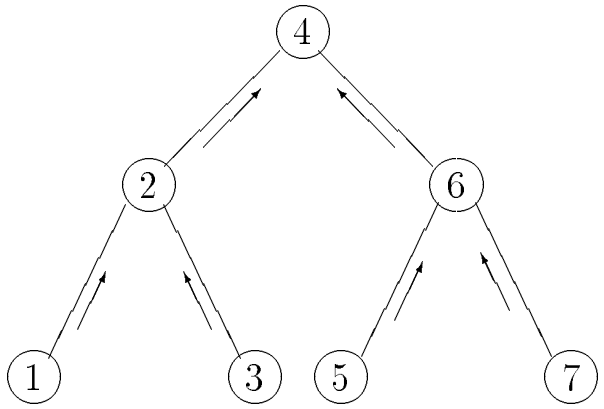

Overlapping Tress

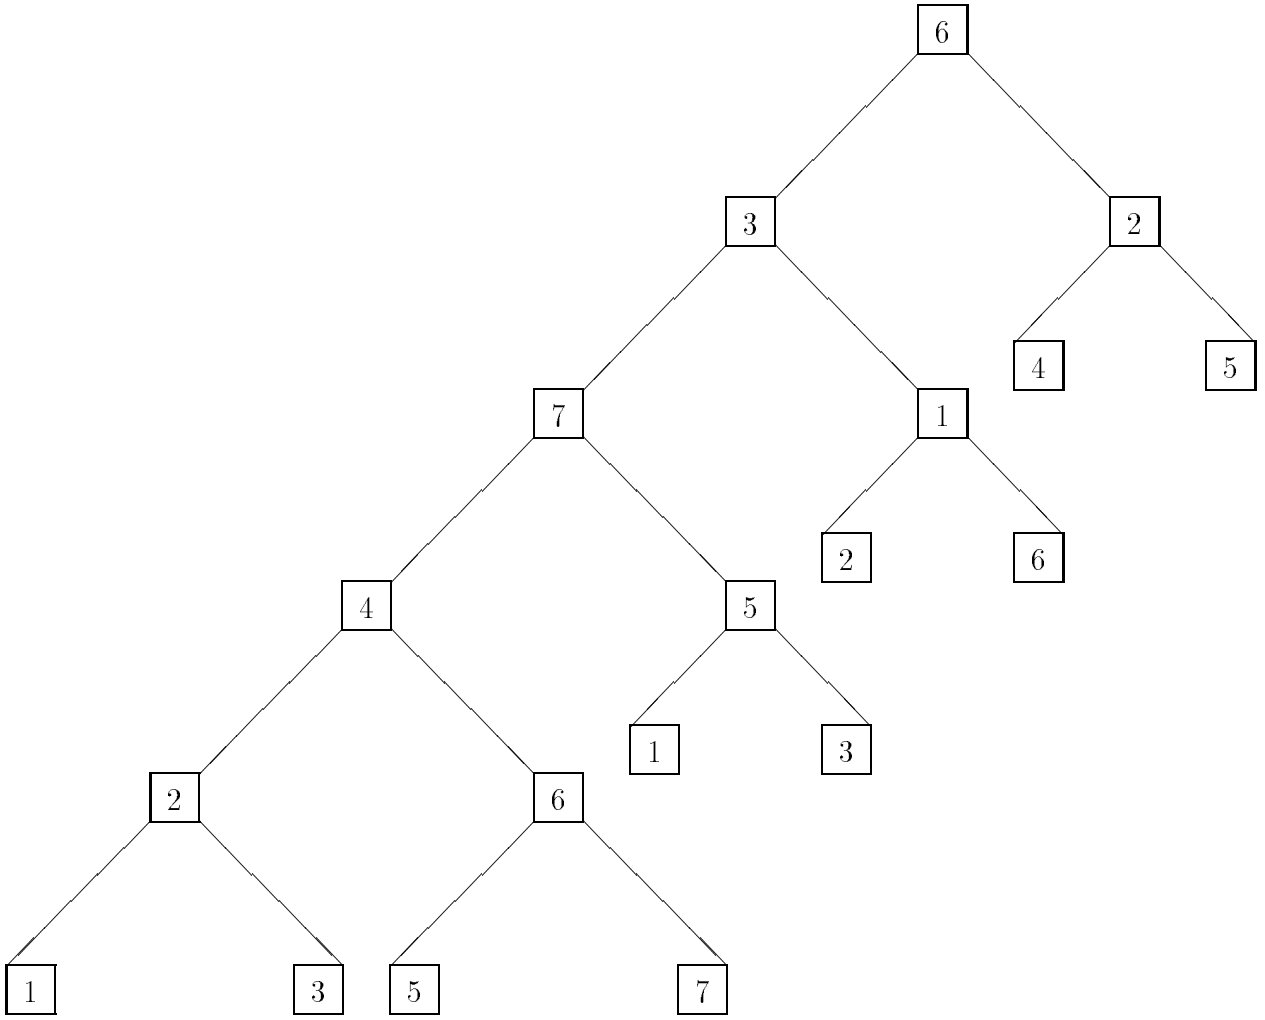

Message Flow Table

- Revolving Hierarchy
  - number of nodes = 7

time step	Messages		idle
1	$2 \leftarrow 1,3$	$6 \leftarrow 5,7$	4
2	$4 \leftarrow 2,6$	$5 \leftarrow 1,3$	7
3	$7 \leftarrow 4,5$	$1 \leftarrow 2,6$	3
4	$3 \leftarrow 7,1$	$2 \leftarrow 4,5$	6

- Reorganization of Hierarchy
- Reuse of messages

$$\begin{pmatrix} 1 & 2 & 3 & 4 & 5 & 6 & 7 \\ 5 & 1 & 7 & 2 & 6 & 3 & 4 \end{pmatrix}$$

Requirements for Desired Permutation

- Gather tree constraints
  - interior nodes of T_i = subtree of T_{i+1}
- Fairness constraints
  - No cycle of size less than N.

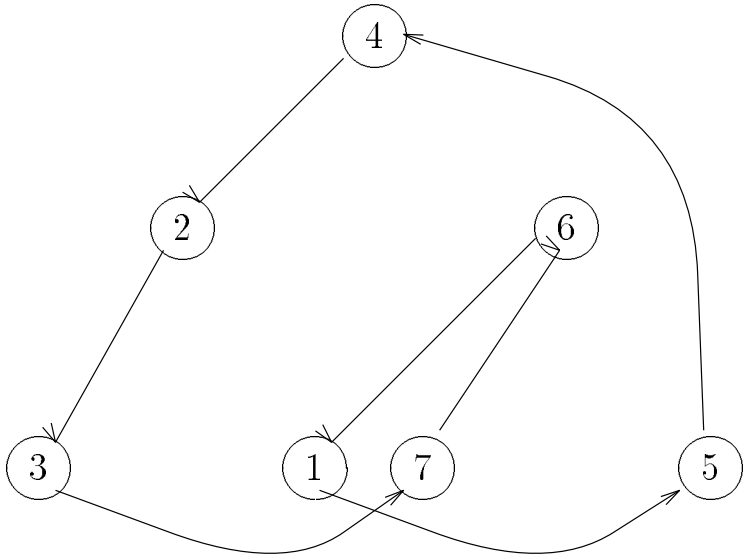

Interesting but ..

- Does there always exist such a permutation ?
- Is there a systematic method to find it ?
- Is there an efficient implementation for it ?

Method to Generate the Permutation

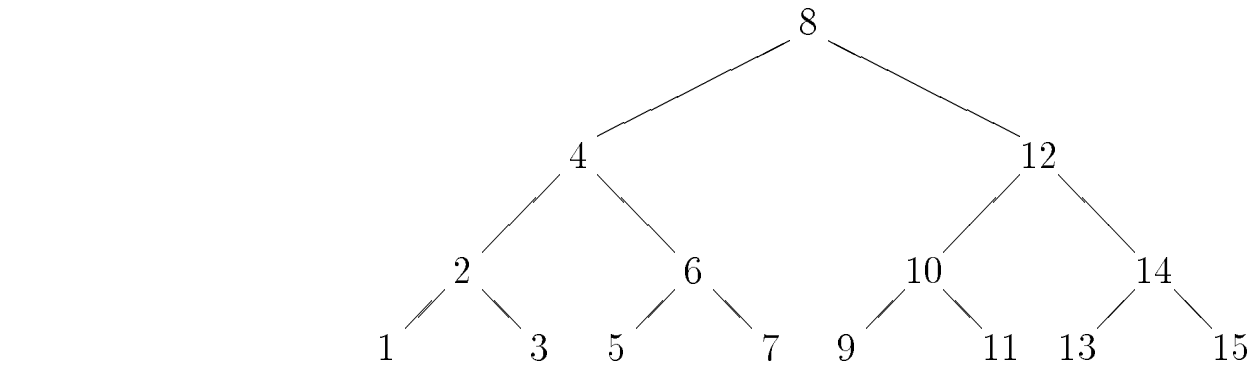

$next(x)$:

$[$

$even(x) \rightarrow$ $x' := x/2;$ (* gather tree constraint *)

$\Box$

$odd(x) \wedge (x < 2^{n-1}) \rightarrow$ $x' := x + 2^{n-1};$ (*fairness constraint *)

$\Box$

$odd(x) \wedge (x > 2^{n-1}) \rightarrow$

$[$ $x = N \rightarrow$ $x' := (N-1)/2;$

$\Box$

$x \neq N \rightarrow$ $y := x - 2^{n-1} + 2$

$x' := y * 2^{\lceil \log \frac{2^n}{y} - 1 \rceil}$

$]$

$]$

Implementation 1

Q: Who should I send message to at time t ?

$$msg(x,t) = next^{-t}(parent(next^t(x))), \text{ if } next^t(x) \text{ is odd}$$
$$= nil, \text{ otherwise}$$

x is in-order label

$next$ is the new position function

$parent$ is the parent function for in-order labeling

parent of $x = x$ with last two bits changed to 10

Implemetation 2

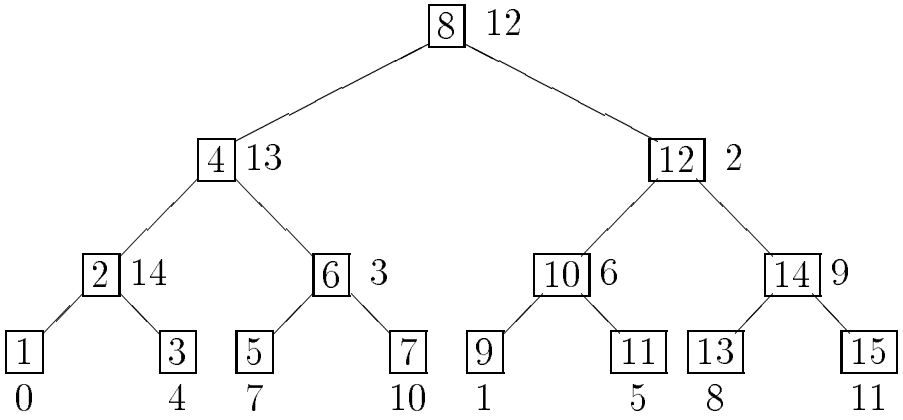

$$msg(x,t) = new_parent(x+t) - t, \quad \text{if } (x+t) \text{ is a leaf-node}$$
$$= nil, \quad \text{otherwise}$$

- Just need to store new_parent array

Communication Required

- Communication distance set (CDS)

$$= \{new_parent(j) - j \mid j \text{ a leaf node } \}$$

- process x will send a message to process y iff $y - x \in CDS$.
  - for $N = 15$

$$CDS = \{1, 5, 8, 10, 13, 14\}.$$

- CDS depends on the $next$ function.

Data Gathering and Broadcasting

- a process can send/receive only one message per time step
- require that the same set of messages is used for data gathering and broadcasting.
- Constraints :
  1. fairness contraints
     - equal load
  2. gather tree constraints.
     - $G(t)$ available at $t + \log N$ time step at one node.
  3. broadcast constraints.
     - $G(t)$ available at $t + 2\log N$ time step at all nodes.

Message Flow Table

time step	Messages			
0	$0 \rightarrow 7$	$4 \rightarrow 6$	$1 \rightarrow 3$	$2 \rightarrow 5$
1	$7 \rightarrow 6$	$3 \rightarrow 5$	$0 \rightarrow 2$	$1 \rightarrow 4$
2	$6 \rightarrow 5$	$2 \rightarrow 4$	$7 \rightarrow 1$	$0 \rightarrow 3$
3	$5 \rightarrow 4$	$1 \rightarrow 3$	$6 \rightarrow 0$	$7 \rightarrow 2$
4	$4 \rightarrow 3$	$0 \rightarrow 2$	$5 \rightarrow 7$	$6 \rightarrow 1$

- fairness in workload
- four times less messages than static hierarchy

Method to Generate the Permutation

$bcnext(x)$ ::

$$
\begin{array}{lll}
[& b_0 = 1 \rightarrow & x' := RS_0(x) \\
 & & \text{(* gather tree *)} \\
\square & & \\
 & (b_0 = 0) \wedge (b_1 = 0) \rightarrow & x' := RS_1(x) \\
 & & \text{(* broadcast *)} \\
\square & & \\
 & (b_0 = 0) \wedge (b_1 = 1) \rightarrow & x' := LS_1^a \left((LS_0^b(x) + 2) \text{ mod } 2^{n-1} \right); \\
 & & \text{(* fairness *)} \\
] & &
\end{array}
$$

$b_{n-1} \cdots b_0 = x$

$RS_p =$ Right shift with p as m.s.b

$LS_p =$ Left shift with p as l.s.b.

$a =$ number of leading zeros

$b =$ number of leading ones

Algorithm to find Current Minimum in the Network

- Distributed branch and bound
- Distributed simulation
  - process x : $step = 0$

$$
*[\ dest_msg(x, step) \neq nil \rightarrow\ send_msg(dest_msg(x, step), mymin)
$$
$$
step := step + 1
$$
$$
\quad src_msg(x, step) \neq nil \rightarrow\ recv_msg(src_msg(x, step), hismin)
$$
$$
\text{recompute } mymin
$$
$$
step := step + 1
$$
$$
]
$$

Performance of the Algorithm

- at most k messages handled by a node/time step
- the global function $G(t)$ is available at $t + \lceil \log N \rceil$ time steps.
- a throughput of one global function per times step.
- number of messages required $\sim$ half of that for static hierarcy.
- equal workload distribution

Extensions

- General N
  - use virtual nodes

- General k
  - methods to generate permutations for binary trees generalize to k-ary trees.

- asynchronous messages
  - can be used instead od synchronous messages. Nodes synchronized due to "receives".

Conclusions

- Useful for algorithms that
  - use hierarchical control
  - run for long time

- main advantages
  - equal workload distribution.
  - reduction in number of messages due to their reuse

- main disadvantages
  - requires that the communication network has more edges than static hierarchy.